图片仅供参考，请以实物为准。
本公司保留产品外观及技术改进的权利，恕不另行通知。
The Picture are for reference only, Please Subject the materials. our company resrves the right to appearance and technical improvement,without prior notice.

BORAMED™

年轻·创造　求真·务实
WE CARRY WE CARE

BORA MEDICAL

Since 2009

秉承卓越品质　塑造经典品牌!

Pursue excellence quality, Created classic brand

佛山市宝来医疗器械有限公司

地址：广东省佛山市禅城区佛罗公路一号
电话：0757-82814605　82814606
邮箱：info@bora-med.com
传真：0757-82814605
ＱＱ ： 16409392
网址：www.bora-med.com

FOSHAN BORA MEDICAL INSTRUMENT CO,.LTD

ADD : No.1,Foluo Rd,Chancheng Dist,Foshan, Guangdong,China
TEL : 0757-82814605　82814606
WhatsApp/Skype : dentalperry
E-MAIL : info@bora-med.com
FAX : 0757-82814605
WEB : www.bora-med.com

注：本公司所有产品已经过出厂前严格检视合格，请放心使用。
Remind:All our products have a strict inspection before delivery, please be assured to use.

淘宝旗舰店　　公司主页

佛山市宝来医疗器械有限公司
FOSHAN BORA MEDICAL INSTRUMENT CO,.LTD

Professional operating in ：Dental unit air compressor sterilizer dental high and low speed handpiece apex locator and dental accessories

The best solution for your demand

2015.6

企业简介
COMPANY INTRODUCTION

佛山市宝来医疗器械有限公司是一家集口腔医疗设备的研发、整合、营销、售后维修为一体的综合性服务型企业，自公司成立以来，我们秉承“诚信第一、服务领先、技术专业、客户放心"的经营理念，运用最先进的经营管理模式，培养最专业的技术人员和营销团队，充分整合公司优势资源，为广大海内外客户提供最优质的产品，最贴心的服务，让所有客户买的放心，用的舒心，愉快购物。基于广大客户的高度认可，迄今为止我们已与上千家海内外大型口腔设备经销商建立战略合作伙伴关系。

我公司拥有严格的质检流程，完善的仓储体系，我们也提供代理包装，安排货运报关等一站式全程服务。我们将一如既往的不断更新升级我们的产品，提升更加优质的服务，我们诚挚地希望与所有口腔界的朋友建立友好的业务往来和合作关系，共同开拓，共同为发展口腔事业而努力。

我公司的主要经营产品有高低速涡轮手机，牙科综合治疗机，高温灭菌器，X射线机，美白仪，洁牙机，LED光固化机，无油空压机，手机清洗注油机，高速金刚砂车针，根管锉，测压针，大锥度针以及牙椅配件等系列产品。

Foshan Bora Medical instrument co,.ltd is a comprehensive manufacture specializing in dental instrument's research,conformity,marketing,after-sales service.since our company established,we are adhering to the concept of integrity first,unique service,professional technology,customers satisfaction.we applied the advanced management mode,treated the best professional technical staff and sales group,integrated our company advanced resources,supplied our customers best quality products and warmly service,ensure all customers buy the assured products with enjoyable and happy shopping feeling.Based on our high recognition by general customers,we have established strategic cooperative partnership with more than thousands of in and overseas dental dealers.

Our company has strict quality inspection process, perfect warehousing system, we also provide a one-station services such as the packing,forwarder and customs declaration service. We will continue to upgrade of our products, improve our quality of service, we sincerely hope to establish friendly business with all friends of the dental community.we can be together to have business cooperation and common development, strive for the development of dental business

Our main products is Bora high and low speed handpiece,dental unit,autoclave,X ray machine,teeth whitening machine,ultrasonic scaler,LED curing light,oilless air compressor,handpiece lubricator,diamond burs,root canal files,protaper,metal and plasitc dental unit spare parts etc.

目录 Contents

高速手机系列 High Speed handpiece 01
低速手机系列 Low Speed Handpiece 04
手机车针 Dimond Burs 07
根管扩大器 Dental root canal 09
注油清洗机 Lubricant Device 10
光固化 Curing light 12
涡轮机 Turbine 16
X光机 X-Ray unit 18
美白仪 Teeth whitening 19
内窥镜 Endoscopy 20
洁牙机 Ultrasonic Scaler 22
牙科椅 Dental unit 24
空压机 Oilless&silence air compressor 27
医生座椅 Doctor Chair 29
打磨机与配件 Mirco Motor Accessories series 31
手机配件 Handpiece Accessories series 33
口腔灯 Oral Light Accessories series 35
手机线管 Handpiece Tube 41
手机特点 Different of Bora Handpiece 43
泵头结构 Pump Structure Diagram 44
企业风采 Company style 45

防滑 安全 得心应手

skidproof, safe, gives you the most control

磨砂系列
Frosted series

超静音设计

专业，专注，专心，
精益求精的态度，
每一道生产流程精细把控，
严格把关，
诠释高品质产品的美妙，
引领产品新思维。

Rigorous and earnest
work manner,
Strict quality control,
Create a quiet
and cozy
atmosphere for you

大扭距，高动力
Large Torque　　High power

使用起来更顺畅
To use more smoothly

取针手机
Standrd Push High Speed Handpiece

BR-101
标准取针手机
Standard High Speed
Handpiece by key

BR-102
磨砂取针手机
Frosted Standard High Speed
Handpiece by key

45度角手机
Standrd Push High Speed Handpiece

BR-103
MAX 45° 标准按压手机
Max 45° Standard Push Button
High Speed Handpiece

BR-104
T3 45° 标准按压手机
T3 45° Standard Push Button
High Speed Handpiece

快接手机
Standrd Push High Speed Handpiece

BR-105
MAX 标准按压手机带快换
Max Standard Push Button
High Speed Handpiece (Coupling)

BR-106
T3 标准按压手机带快换
T3 Standard Push Button
High Speed Handpiece (Coupling)

按压手机
Standrd Push High Speed Handpiece

BR-201
磨砂标准按压手机
Frosted Standard Push Button
High Speed Handpiece

BR-202
T3 标准按压手机
T3 Standard Push Button
High Speed Handpiece

BR-203
Max标准按压手机
Max Standard Push Button
High Speed Handpiece

BR-204
标准按压手机
Standard Push Button
High Speed Handpiece

BR-205
彩虹高速手机 (按压式)
Colorful Standard Push Button
High speed handpiece

备注：多种颜色可选
Marking:Opitional colors

Technical/技术参数：

工作气压：0.20MPa–0.30MPa (推荐使用0.22Mpa)
转速：350，000–400，000R.P.M.
适用车针: Φ1.595–1.600mm
手柄材质：铝合金
手机净重：45 g
喷雾方式：单点喷雾
取针方式：按压式
可选颜色：粉红色–A、紫色–B、浅蓝色–C、
金色–D、蓝色–E、黑色–F
噪音：≤70dB

WORKING AIR PRESSURE: 0.20MPa–0.30MPa (0.22Mpa preferred)
ROTATION SPEED: 350,000–400,000R.P.M.
BUR APPLICABLE: Φ1.595–1.600mm
HANDLE MATERIAL: Aluminum alloys
NET WEIGHT: 45 g
SPRAY: Single water spray
CHUCK TYPE: push button I wrench chuck
OPTIONAL COLOR: PINK––A、APRICOT––B、
LIGHT BLUE––C、GOLDEN–D、BLUE–E、BLACK–F
NOISE: not exceed 70dB

风光手机
Genrator high speed handpiece

BR-301
磨砂标准风光手机
Frosted Standard Push Button
Generator High Speed Handpiece

BR-302
T3标准风光手机
T3 Standard Push Button
Generator High Speed Handpiece

BR-303
Max 标准风光手机
Max Standard Push Button
Generator High Speed Handpiece

BR-304
Max 45度角风光手机
Max Standard Push Button
Generator High Speed Handpiece

BR-305
Max 45度角风光手机（带快换）
Max 45° Standard Push Button
Generator High Speed Handpiece
(Coupling)

BR-306
磨砂标准风光手机（带快换）
Frosted Standard Push Button
Generator High Speed Handpiece
(Coupling)

内水道手机
Inner Channel Low Speed Handpiece

BR-401
内水道低速手机
Inner Channel
Low Speed Handpiece

BR-402
外水道低速手机
External Channel
Low Speed Handpiece

BR-403
外水道低速手机
External Channel
Low Speed Handpiece

Technical:
Innter/External channel Low speed handpiece, 1:1
Air pressure:0.3Mpa
Rotation speed:about 20,000 rpm
Bur applicable:Φ2.35-0.016mm (IS01797-1)
Noise: ≤70dB

技术参数：
内/外水道低速手机，弯机1:1
工作气压：0.3Mpa
转速：约20,000rpm
适用车针: ΦD2.35-0.016mm(IS01797-1)
噪音：≤70dB

新款弯机
1:1Direct Drive

BR–501
新款弯机
Contra Angle
(for CA burs φ2.35)
Max.30,000RPM

BR–502
新款按压弯机
Push button contra angle
(for CA burs φ2.35)
Max.40,000RPM

BR–503
新款按压弯机
Push button contra angle
(for FG burs φ1.6)
Max.40,000RPM

旧款弯机
1:1Direct Drive

BR–504
旧款弯机
Contra Angle
(for CA burs φ2.35)
Max.30,000RPM

BR–505
旧款按压弯机
Push button contra angle
(for CA burs φ2.35)
Max.40,000RPM

BR–506
旧款按压弯机
Push button contra angle
(for FG burs φ1.6)
Max.40,000RPM

备注：另有4:1/16:1/20:1/64:1 减速弯机可选!
Marking:4:1/16:1/20:1/64:1 Reduction Drive for optional choose!

低速直机
Straight Handpieces

气动马达
Air Motor

BR-601
内水道直机
Inner Channel Straight Handpiece

BR-602
新款直机
Straight Handpiece

BR-603
旧款直机
Straight Handpiece

BR-604
内水道马达（2/4孔）
Inner Channel Air Motor
(2/4 Hole)

BR-605
新款马达（2/4孔）
Air Motor(2/4 Hole)

BR-606
旧款马达（2/4孔）
Air Motor(2/4 Hole)

BR-607
标准开放式按压机芯
Standard Push Cartridge

BR-608
标准开放式按压机芯
Standard Push Cartridge

BR-609
标准按压机芯
Standard Push Cartridge

BR-610
标准取针机芯
Standard Cartridge

整体式更换维修简单，省事又省力

陶瓷珠带防尘盖轴承
防止异物进入和油脂溢出
保持卫生且寿命更长
高转低声音圆润
噪音低，让工作更舒服

进口材料，加厚风轮
完美动力学设计
抗氧化，有效的抗拉扯断裂
强劲的大扭力动力
让您操作得心应手

超精密弹簧按压轴
反复按压8000多次不变形
锁针有力不飞针

BR-701
H/K锉
H/K File

BR-702
P钻
P Gates

BR-703
G钻
G Gates

BR-704
带柄拔髓针
Barbed broaches

BR-705
K锉
K File

BR-706
G钻
G Gates

BR-707
大锥度锉
Protaper

BR-708
版装车针
Diamond burs

功能及特点

1. 坚硬、耐磨。
2. 不掉砂。
3. 颜色、规格统一。
4. 型号齐全。
5. 天然钻石粉，硬度高，可保证车针锋利度。
6. 采用高级技术将钻石粉固定，不会出现整片脱落现象，可保证车针的耐用度。
7. 使用高精程控车加工，使柄身具有高度准确的同轴度和尺寸，不会产生摆动，从面方便医生操作并且不损伤手机轴芯和轴承。
8. 柄身采用高档不锈钢材料，强度高，不生锈。
9. 最大允许转速450，000转/分。

Function

1.Hard and staying quality.
2.Not easy to lose diamond sand.
3.Same color,sice aline with same model of burs
4.All model for choice.

BR-709
盒装车针
Diamond burs

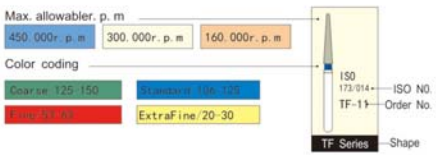

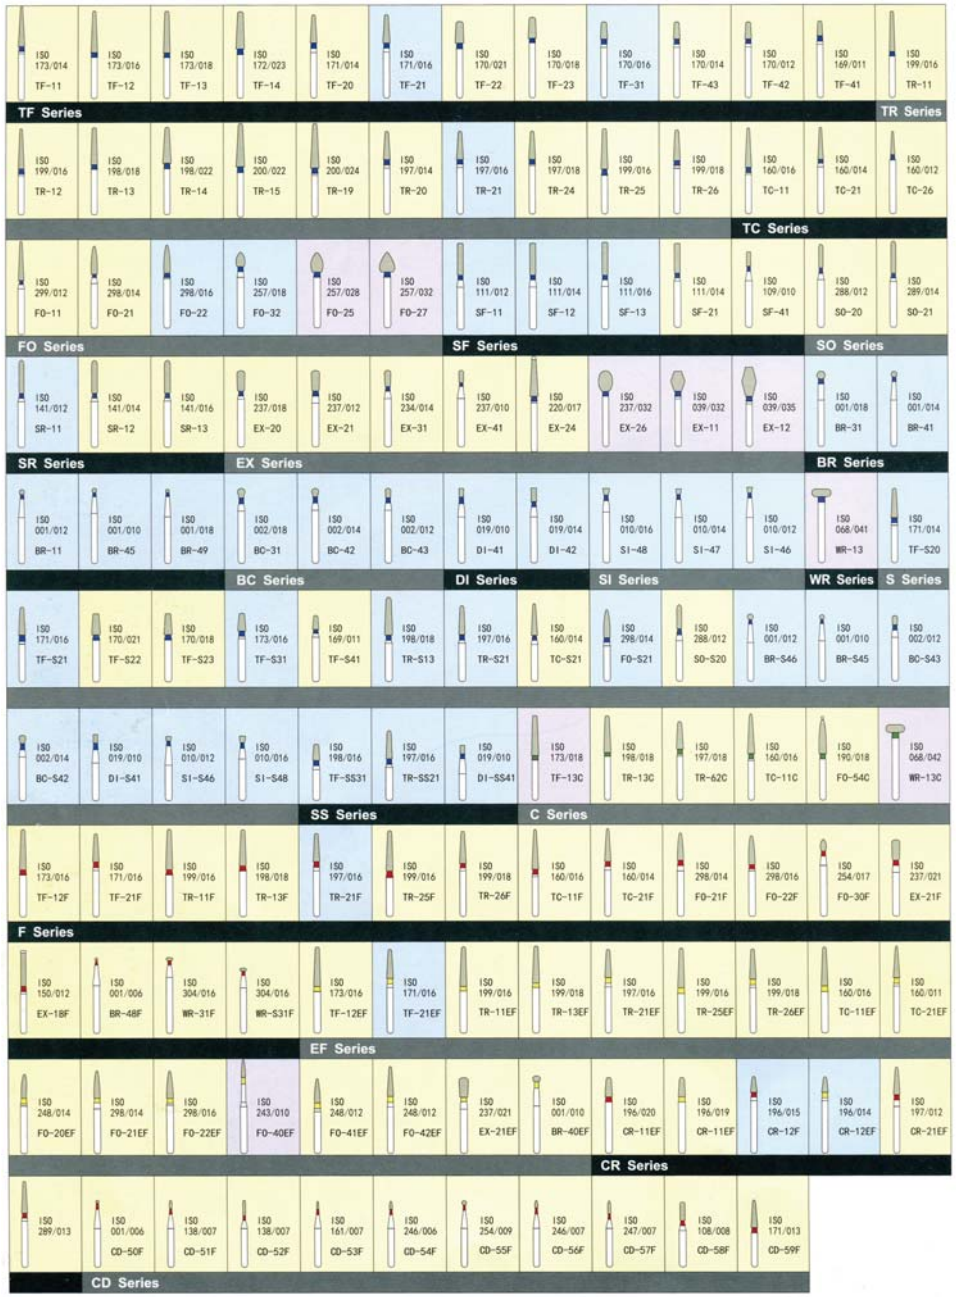

根管扩大器系列 DENTAL ROOT CANAL INSTRUMENT

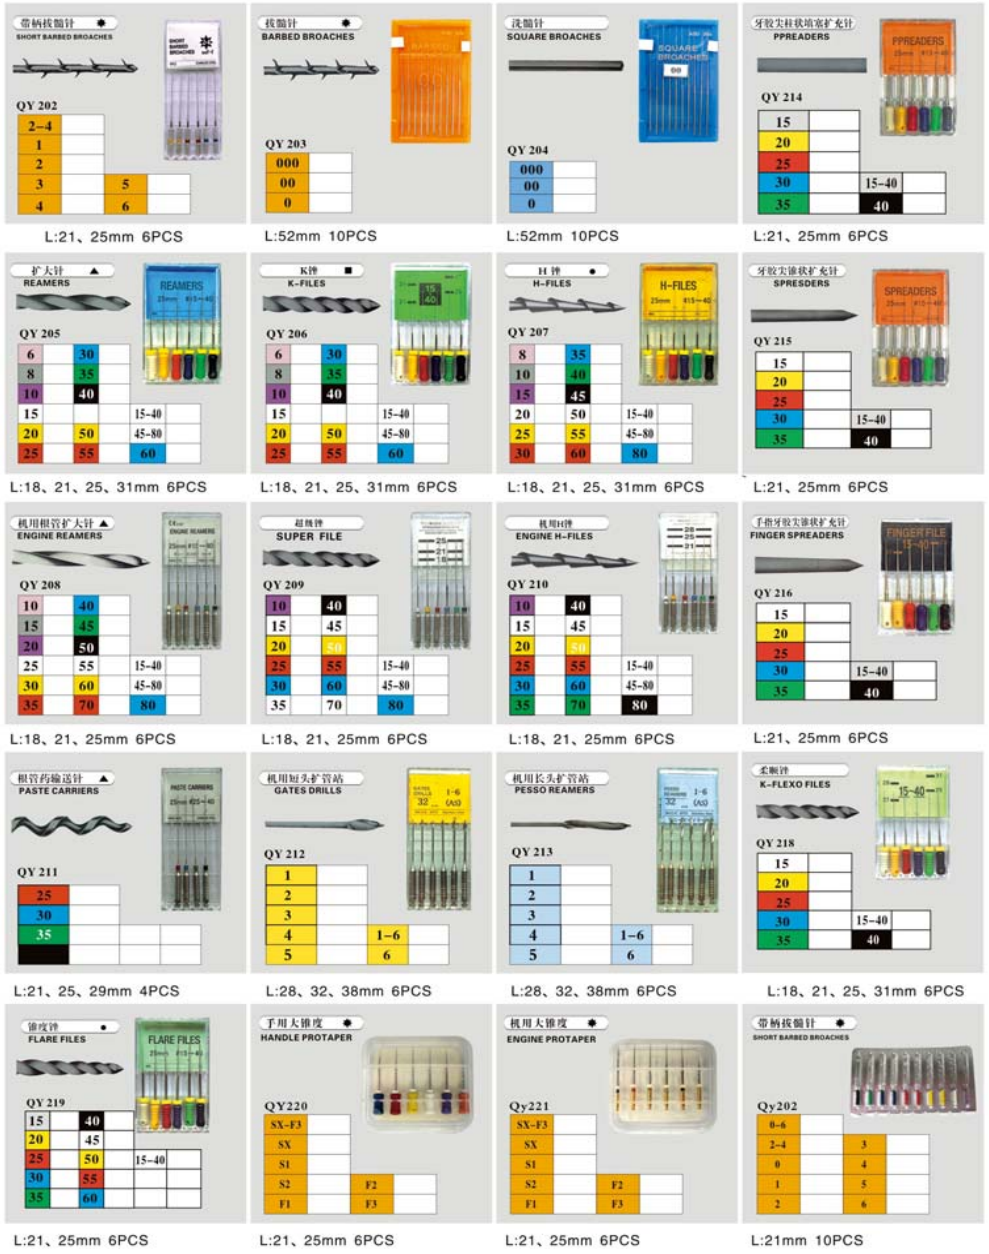

注油清洗机 Lubricant Device

质保1年 Guarantee 1year

BR-1001

注油清洗机功能及特点

1.三种工作模式，短模式、长模式、超长模式。
2.同时可供三支手机注油。
3.备有直机、弯机专用接口。
4.带油量显示，可装300毫升的油。
5.空气源压力:4kg/cm2—8kg/cm²
6.电源电压:220v110V
7.洗净注油后，按吹风按键，气体可将手机内的剩余油吹干净。
8.净重:7kg
9.重量：9.45kg
10.包装尺寸:39.4×46×48cm

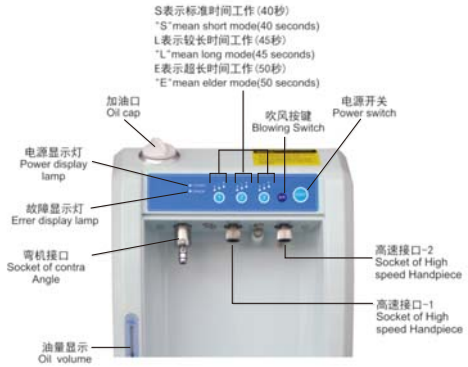

Functions and features

1.3 work modes:short time mode,Long time
2.Oil in three handpieces at the same time.
3.with socket of the staighe handiece and the contra Angle.
4.Show the amount oil tota(30ml)
5.Working air pressure:0.5Mpa.
6.Working voltage:AC 110–220V
7.Press to blow the Air key after cleaning the oil, the air can blow cleanly the surplus oil in the handpicec.
8.Gross weight:9.45kg.
9Package size:39.4x46x48cm

带数显注油清洗机
Digtal Lubricant Device

质保1年 Guarantee 1year

可为每支手机设定注油时间
Set Work Time For Each Handpiece

技术参数
1.电源电压:220v110V
2.额定功率:40W
3.空气源压力:4kg/cm2—8kg/cm2
4.工作压力:2.5kg/cm2
5.油罐容量:300ml

BR-1101

6.电机参数:
额定电压：12V直流
额定功率：60W
转数：3000转/分
7.工作环境温度：5–40℃
8.净重:7kg
9.机器尺寸:24×23.5×37.5cm
10.包装尺寸:29×23.5×37.5cm

Parameters:White
(1).Supply Voltage.
A:AC220V
B:AC110V
(2).Power.40W
(3).Air pressure:2.5kg/cm2
(4).Working pressure:2.5kg/cm2
(5).Volune:300ml
(6).Blower paranter:
A.voltage rating:AC 12V
B.power rating:60W
C.rotating speed:3000rpm/min
(7).Working Temperature:5℃–40℃
(8).Net weignt:7KG
(9).Net size:24×19×31cm
(10).Carton size:29×23.5×37.5cm

BR-1102
超声波清洗机（800）
Digtal Ultrasonic Cleaner(800)

BR-1103
超声波清洗机2000
（带数码时间显示）
Digtal Ultrasonic Cleaner2000
(with Digital Time Display)

BR-1104
超声波清洗机1200
Digtal Ultrasonic Cleaner1200

BR-1105
超声波清洗机1200H
(带加热功能)
Digtal Ultrasonic Cleaner1200H
(with heating function)

BR-1106
超声波清洗机(2.5L)
Digtal Ultrasonic Cleaner(2.5L)

BR-1107
银汞调合机
Amalgamator

BR-1108
手机清洁润滑剂
Handpiece Oil

BR-1109
注油清洗机油
Lubricant Oil

BR-1110
手机清洁润滑油
Handpiece Oil

座充式LED光固化机(带液晶显示屏)
Charger LED curing light(with LCD)

NEW

质保2年 Guarantee 2years

BR-1201

功能特点
1.革新设计的蓝/白光功能，固化，照明两用
2.三种模式功率可调800、1000、1200mW/cm2
3.LCD液晶屏显示工作状态
4.恒定光功率输出，不因电池锂下降而影响固化效果
5.高效电光转换效率，充满一次电可连续使用200次以上
6.四种工作模式，全功率，渐亮、脉冲、自适应（前10秒50%）
7.仿生学流线型设计，豪华大方，操作舒适
8.人性化可拆卸锂电池设计

Function
1.Brand new designed Blue/White light source with double function:Curing and Lighting.
2.Three adjustable light intensity:800,1000,1200mW/cm2
3.LCD screen display the working situation.
4.Constant light intensity output, it will not be affected by lowe battery
5.High efficiency for exchange rate from elecrticity to light, A full charge can be used for more than 200 times continuously
6.Four working mode:Full,Ramp, Pules and preheating mode (The first 10s is with 50% power output,and the rset time with full pwer output)
7.Bicnic streamline design,luxury and comfortable to operate.
8.Humanized design with the battery can be replaced

使用范围
可固化任何品牌树脂材料

Application Range:
It can be used for all brand of resin material.

技术参数
1.充电器工作电压：AC100–240V，50/60Hz
2.波长：420–480nm
3.光功率：1000–1400mW/cm2

Techcial Date:
1.Working voltage for adapter:AC100–240V，50/60Hz
2.Wave length：420–480nm
3.Light intensity：1000–1400mW/cm2

LED光固化机(带液晶显示屏)
LED curing light(with LCD)

质保2年 Guarantee 2years

NEW

BR-1202

功能特点
1.多彩搭配仿生手柄恒温设计
2.恒定光功率输出，不因电池锂下降而影响固化效果
3.高效电光转换效率，充满一次电可连续使用200次以上
4.三种工作模式，全功率，渐亮、脉冲
5.时间设定：5S–40S 自动记录上次制定数值
6.使用方式：无线式，锂电池可更换
7. 可选有线配装牙科治疗台使用

Function
1.Colorfull Rionic handle design
2.Constant light intensity output, it will not be affected by low battery
3.High efficiency for exchange rate from elecrticity to light, A full charge can be used for more than 200 times continuously
4.Threeworking mode:Full power output,Ramp and Pules mode
5.Time setting:5s–40s,it will remember the last setting automatically.
6.Usage mode :wireless,the Li–ion battery and be exchanged.
7.Optional wited one to be equipped with the dental unit.

使用范围
可固化任何品牌树脂材料

Application Range:
It can be used for all brand of resin material.

技术参数
1.充电器工作电压：AC100–240V，50/60Hz
2.波长：420–480nm
3.光功率：1000–1200mW/cm²
4.外包装规格：26x19x9cm
5.重量：500克

Techcial Date:
1.Working voltage for adapter:AC100–240V，50/60Hz
2.Wave length：420–480nm
3.Light intensity：1000–1200mW/cm²
4.Dimension for package:26x19x9cm
5.Weight:500g

座充式带数显LED光固化机
LED Curing light with digital(with pedestal)

方便拆卸更换的锂电池
Easy to remove or replace the battery.

BR-1301

功能特点
1.亮丽的铝合金外壳
2.5W大功率LED
3.高通透率玻璃光纤
4.强光、渐亮、闪亮三种工作模式
选择工作时间可调
5.自动待机，自动关机
6.电量警告
7.超大容锂电池
8.适合任何品牌树脂材料

Function
1 .Cover by Aluminum alloy
2.5w Big power LED
3.High articulation optical fiber
4.Working modes:strong,gradually strong,flashing
5.Automatic standby.Automatic shutdown
6.Low ballery alert
7.Large-capacily lithium battery
8.Solidify all brands of resin materials

技术参数
1.充电电池容量：2200MS/H3. 7V
2.充电器工作电压：AC100-240V 50-60Hz
3.波长：450-480mm
4.光功率：大于1000mw/cm2
5.固化时间及深度：5s/3mm
6.大容量锂电池，超长待机时间：90天以上

Technology data
1.Capability to battery: 2200MA/H3.7V
2.Workin9 voltage: AC100-240V 50-60Hz
3.wavelength:450-480mm
4.Light power: more than 1000mw/ cm2
5.Solidfication time and depth:5s/3mm
6.Large-capacity lithium battery,ultra-long standby time:90 days

备注
1、主机、LED灯保修两年（人为原因不在保修内）
2、电源线、变压器保修一年（人为原因不在保修内）
3、电池保修三个月（人为原因不在保修内）
4、重量：0.865kg
5、包装规格：7.2×5.5×8.6cm

Guarantee
1 .Mainframe, LEO light: 2 years (Man-made causes is not within the warranty)
2.Power Cord.Transformer:1 year (Man-made causes is not within the warranty)
3.Battery: 3 months (Man-made causes is not within the warranty)
4.Weight:0.865kg
5.Size: 7.2×5.5×8.6cm

插电式LED光固化机（带数显）
LED Curing light with digital(Plug in)

BR-1302

功能特点
1、亮丽的铝合金外壳
2、5W大功率LED
3、高通透率玻璃光纤
4、强光、渐亮、闪亮三种工作模式选择
5、自动待机，自动关机
6、设置数码显示工作时间、倒计时功能
7、适合任何品牌树脂材料
8、本品可直接装置于牙椅上工作。

技术参数
1、波长：450-480mm
2、光功率：大于1000mw/cm2
3、固化时间及深度：5s/3m

Technology data
1.wavelength:450-480mm
2.Light power:more than 1000mv/cm2
3.Solidification time and depth:5s/3mm

Function
1.Cover by aluminum alloy
2.5w Big power LED
3.High articulation optical fiber
4.Working modes:strong,gradually strong, flashing
5.Automatic standby,Automatic shutdown
6.Can set the working time
7.Solidify all brands of resin materials
8.This product can be installed on the dental chair directly

备注
1、主机、LED灯保修两年（人为原因不在保修内）
2、电源线、变压器保修一年（人为原因不在保修内）
3、重量：0.865kg
4、包装规格：7.2x5.5x8.6cm

Guarntee
1.Mainframe ,LED light:2years(Man-made causes is not within the wsrranty)
2.Power cord transformer:1 years (Man-made causes is not within the wsrranty)
3.Weight:0.865kg
4.Size:7.2x5.5x8.6cm

卤素灯光固化机
Haloqen curing light

备注：本产品可设置数码显示时间同时拥有三种工作模式，技术处于行业领先地位。
This productan show and set working Time in the digital display,and it has three modes.
In the curing light field,Its technology is in the leading position.

BR-1401

功能特点
1、高通透率玻璃光纤
2、强光、渐亮、闪亮三种工作模式，自动待机、自动关机
4、电量警告
5、可设置数码显示工作时间、倒计时功能
6、适合任何品牌树脂材料

Feature
1.Big power qualified halogen light source, stable
2.Imported, silent, powerful fan
3.2-stage light power design, first, solidify the meaterials with weak light, then accelerate the solidification with strong light
4.Separately strong and weak light control timer
5.Automatic overheat protection
6.Streamline design, accord with somatology, easy operation
7.Super strong optical fiber
8.includes an orange shade shim for blue light, protecting the user's safety.

Application
Solidify all brands of resin materials.

Tenchnical data
1.Charger (adaptor)worki ng voltage:
AC110/220V±10%, 50-60Hz internal:AC12V.
2. Wave length:400-500nm.
3. Light power:more than 600mw/cm²

牙胶尖切断器
Gutta cutter

6色可选：黄、蓝、绿、白、红、紫

BR-1402

技术参数

1 手柄规格 长度：126mm 直径 19mm
2 功率 2.5W
3 电池容量 1.2V 2400毫安
4 净重 0.28KG
5 包装 15x12x4cm

Battery 1.2V 2400mAh
Charger input voltage AC230V,50Hz;AC110V,60Hz
Power 2.5W
tips: 4 different shape heat
tips Color: 6 colors for choice
Net weight 0.28kg
Packing size 15x12x4cm

1. Ingenious design, conform to the human body engineering.
2. Wireless type, the operation is nimber and easy.
3. Fast heating, highest temperature of 260o C.
4. Fever needle can be sterilized and repeatedly used.
5. High capacity and rechargeable Ni-MH battery.
6. Selective colors: yellow, blue, white, green, red and purple.

使用过程中的操作方法：

1、 牙胶切断器的切割头、切割头端部的弯曲部分，均与按钮互相处于相对应的位置，以便于进行操作。

2、 切割头必须在冷却的状态下安装在手柄上(在安装切割头的过程中不应当对按钮进行操作)，操作过程中，利用切割头上的弯曲的部分来切割牙胶。

3、 在开始进行操作之前，请先确认切割头已经正确地安装。清洁：经过几分钟的加热之后，切割头很容易清洁。

4、 当牙胶切割完毕之后，松开按钮，等待切割头冷却下来之后，才能将其从病人的口中取出来。

座充式带数显LED光固化机(塑料带LED显示屏)
LED Curing light with digital (plastic with LED display)

备注：本产品可设置数码显示时间同时拥有三种工作模式，技术处于行业领先地位。
This productan show and set working Time in the digital display,and it has three modes. In the curing light field,Its technology is in the leading position.

BR-1501

功能特点
1.环保型塑料外壳
2.5W大功率LED
3.高通透率玻璃光纤
4.强光、渐亮、闪亮三种工作模式
选择工作时间可调
5.自动待机，自动关机
6.电量警告
7.超大容锂电池
8.适合任何品牌树脂材料

Function
1.Cover by plastic materials
2.5w Big power LED
3.High articulation optical fiber
4.Working modes:strong,gradually strong,flashing
5.Automatic standby.Automatic shutdown
6.Low ballery alert
7.Large-capacily lithium battery
8.Solidify all brands of resin materials

技术参数
1.充电电池容量：2200MS/H3. 7V
2.充电器工作电压：AC100-240V 50-60Hz
3.波长：450-480mm
4.光功率：大于1000mw/cm2
5.固化时间及深度：5s/3mm
6.大容量锂电池，超长待机时间：90天以上

Technology data
1.Capability to battery: 2200MA/H3.7V
2.Workin9 voltage: AC100-240V 50-60Hz
3.wavelength:450-480mm
4.Light power: more than 1000mw/ cm2
5.Solidfication time and depth:5s/3mm
6.Large-capacity lithium battery,ultra-long standby time:90 days

备注
1、主机、LED灯保修两年（人为原因不在保修内）
2、电源线、变压器保修一年（人为原因不在保修内）
3、电池保修三个月（人为原因不在保修内）
4、重量：0.865kg
5、包装规格：7.2×5.5×8.6cm

Guarantee
1.Mainframe, LED light: 2 years (Man-made causes is not within the warranty)
2.Power Cord.Transformer:1 year (Man-made causes is not within the warranty)
3.Battery: 3 months (Man-made causes is not within the warranty)
4.Weight:0.865kg
5.Size: 7.2×5.5×8.6cm

座充式LED光固化机(带液晶显示屏)
Charger LED curing light(with LED)

BR-1502

功能特点
1、新款LED灯泡使用寿命更长
2、5W大功率LED 3v高通透率玻璃光纤
4、强光、渐亮、闪亮三种工作模式选择
5、自动待机，自动关机
6、采用冷光源发热量少
7、适合任何品牌树脂材料
8、采用液晶显示屏

Technology data
1.Capability to battery: 2200MA/H3.7V
2.Workingvoltage: AC100-240V 50-60Hz
3.wavelength:450-480mm
4.Lightpower: more than 10OOmw/c2
5.Solidification time and depth: 5s/3mm
6.Large-capacity lithium battery, ultra-long standby time: 90 days

Function
I.New LED bulb long life 5w Big power LED
3.Higharticulation optical fiber
4.Workingmodes: strong, gradually strong, flashing
5.Automaticstandby, Automatic shutdown
6.Lesscalorific value of using cold light source 7.Solidify all brands of resin materials
8.With LCD display

备注
1、主机、LED灯保修两年(人为原因不在保修内）
2、电源线、变压器保修一年(人为原因不在保修内）
3、电池保修三个月（人为原因不在保修内）
4、重量：0.865kg
5、包装规格：7.2x5. 5x8. 6cm

Guarantee
1.Mainframe,LED light: 2 years (Man-made causes is not within the warranty)
2.PowerCord. Transformer: 1 years (Man-made causes is not within the warranty)
3.Battery:3 months (Man-made causes is not within the warranty)
4.Weight:0.865kg
5.Size: 7.2x5.5x8.6cm

便携式涡轮机(2/4孔)
Portable turbine(2/4hole)

BR-1601

BR-1602

技术参数
1、两个高速接口，一个三用枪
2、电源：AC110V-240V 60Hz/50HZ
3、功率：350W/550W/680W
4、流量：60L/min
5、启动压力:0.5Mpa
6、排气压力：0. 8Mpa
7、高速手机最高工作压力：0.36Mpa
8、低速手机最高工作压力：0. 34Mpa
9、噪音：40-50db
10、净重:20KG
11、尺寸:36.5x31.5x30CM

Parameters:
1.two high speed handpiece adaptor, a three way syringe
2.electronical supply: AC110V-240V 60Hz/50HZ
3.power: 350W/550W/680W
4.flow rate: 60L/min
5.starting pressure: 0.5Mpa
6.discharge pressure: 0.8Mpa
7.high speed handpiece maximum working pressure: 0.36Mpa
8.the maximum working pressure low speed handpiece: 0.34Mpa
9.noise: 40-50dB
10.net weight: 20KG
11. size: 36.5x31.5x30CM

功能及特点：
1.铝合金材料制作的箱体坚固、美观、轻便、赠送拉杆及轮子令您轻松出诊。
2.内置二个手机接口、三用喷枪、无油压缩机头、净水瓶、操作简单、插上电源即可工作。
3.低噪音、气源稳定干燥

Function:
1.Aluminium alloy box, Strong, beautiful, light, with bar and wheel, easy to visit a patient at home
2.bulid in 2 PCS handpiece adaptor, 1 pcs 3-way syringe, oilless compressor motor, water storage, plug in and work
3.lower noise, air supply steady and dry

移动式治疗台(2/4孔)
Movable Treatment Desk (2/4 hole)

BR-1603

技术参数
1、三个高速接口，一个三用枪
2、启动压力:0. 5Mpa
3、排气压力:0. 8Mpa
4、高速手机最高工作压力:0. 36Mpa
5、低速手机最高工作压力:0. 34Mpa

Parameters:
1.two high speed handpiece adaptor, a three way syringe
2.starting pressure: 0.5mpa
3.discharge pressure: 0.8mpa
4.high speed handpiece maximum working pressure: 0.36Mpa
5.the maximum working pressure low speed handpiece: 0.34Mpa

BR-1604

塑料带瓶涡轮机(2 /4孔)
Plastic Turbine with bottle(2/4hole)

技术参数
控制方式：气动控制
输入气压：5-8kg
输入水压：2kg
体积：23.5x21.5x15cm
体重：2.5kg

Function
The control way:air
Air pressure:2kg
Volunme:23.5x21.5x15cm
Weight:2.5kg

技术参数
控制方式：气动控制
输入气压：5-8kg
输入水压：2kg
体积：23.5x21.5x15cm
体重：2.5kg

Function
The control way:air
Air pressure:2kg
Volunme:23.5x21.5x15cm
Weight:2.5kg

货号：SD2405
不锈钢带瓶涡轮机(2 /4孔)
Steel Turbine with bottle(2/4hole)

龋齿检测灯 Caries-detected Light

NEW

BR-1701

DDECT 效果

dentine infected with caries will fluorescense red
龋齿感染部位呈红色



under caries-detected light
灯光下检测到龋齿

under goggles
镜下

功能及特点

1、为蛀牙龋齿提供了视觉检测。
2、配合医生准确选择微创位置。
3、安全并最大限度地减少龋齿复发的风险。

Function:

1.Caries-detected light: offers visual detection of caries in opened cavities at a glance.
2.Caries-detected light : supports you to select exactly what you want to excavate minimally invasive.
3.Caries-detected light : gives you security an

比色灯 Base Light

NEW

BR-1702

模拟三种标准光源自然光，白炽灯，日光灯，
在这三种标准光源下对比色板，
使比对的颜色更准确.
Simulation of three kinds of standard illuminant light, incandescent light, fluorescent light,
color board under the three standard light, to make the color more accurate.

旋转口镜 Auto Rotatable Mouth Mirror

NEW

BR-1703

口镜转速14000rpm
容量:两个电池
电源:100 – 240 v AC,60/50Hz,6
消毒温度:135° C
mirror speed 14,000rpm
capacity: two batteries simultaneously
Power supply:100 to 240V AC,60/50Hz,6VA
Autoclavable:135° C

封口机
sealing machine
BR-1704

电压AC power:220V/50Hz
功率Power Rating:500W
保险丝Fuse:3TA
封痕宽度Width:10mm
包装尺寸packing size:430X350X270mm
重量weight:7.3KG

蒸馏水机
water distiller
BR-1705

电源AC power:220V/50Hz
功率Power Rating:750W
制水量Distiller Volume:1.5L/h
内腔尺寸chamber size:180X200mm
外型尺寸unit size:290X290X390mm
包装尺寸packing size:290X260X460mm
数量 weight:4.7KG

移动式 -超低辐射牙科x射线机 Movable type-Lower radiation X-Ray unit

遥控器

BR-1801

技术参数
Technical data
电源条件Power conditions:
Ac220V ±10% 50HZ
X射线管电压、管电流
X-Raytube voltage and current:
60kv~0.50mA
65kv~0.85mA
70kv~1.10mA
计时范围Setting time Range:
0.01-2.OOS
X射线焦点X-Ray spor:
0. 3X0. SmrrV

功能及特点

三种KV选择，满足不同需求 根据不同的情况由微处理器进行合理的设置 远距离，全方位的无线遥控，使用方便 智能控制，微焦点X射线管图象更清晰 低照射剂量，使用更安全

壁挂式-超低辐射牙科x射线机 Wall type-Lower radiation X-Ray unit

技术参数
Technical specification
电源条件 Power conditions: Ac220V 土m 50HZ
X射线管电压、管电流X-Ray tube voltage and current:
60kv-0.50mA 65kv-0.85mA 70kv-1.10mA
计时范围 Time Setting Range: 0.01-2.OOS
X射线焦点X-Ray spor:0. 3x0. 3mm2

泄漏辐射:
1米外泄漏辐射不大于0.002mgy/h
(国家标准规定不超过0.25mgy/h)
radition leakage: >0.002mgy/h
(standard stipulated is 0.25mgy/h)
过滤当里 Filter equivalent: 1.5mmAL
焦皮距 focus-skin distance: 200mm

BR-1802

FEATURES

Three kinds of kv adjustments. Satisfy different of the requirements, easy operation With micro-processor reasonable setting can be set according to the situations Long distance no line and direction remote, convenient to use.
Intedligency control makes the detail of image for the micro-focus X-Ray tube Lower radiation leakage, safe to use

高频X光机(便携式) X stitching Machine

BR-1803

《医用X射线诊断卫生防护标准GBZ-130-2002》规格安全剂量为20pgy/h

超低辐射剂量

独家采用高频(30KHz)预热球管灯丝的技术，球管电流仅为0. 1MA.最大辐 射量<20Mgy/h,无须防护，被称为“绿色X线机”。

1、整机数字化控制，X射线输出精确、稳定
2、拍片时间可调，图像对比度高，成像更清晰
3、体积小，重量轻，使用方便，节约存放空间
4、采用东芝0.3x0. 3微焦点球管，免费保修五年
5、独家采用高频（30KHz)预热球管灯丝技术
6、球管电流仅为0. 1MA。辐射量<20Mgy/h,无须防护，
7、被称为“绿色X线机”
8、首创全程替换式售后服务模式，购机无后顾之忧。

高频X线机和工频X线机的区别

在单位时间(2ms内)，工频机的对球管做功只有1次，而高频机做功要达到 几百次以上,可见高频机的效率是很高的。工频机因为单位时间内做功少， 为了达到输出射线量的要求，只有采取提高幅度值和高压的办法去补救， 高幅度值和高压可以使垃圾射线和辐射距离也成比增长，经仪检测射线口 夹角辐射，工频机的辐射可达到7-8米，并呈散射状，而高频机只有1米， 成很窄的夹角。

冷光牙齿美白仪 Professional teeth whitening

Touch button and display of the head
触摸式按键及显示屏

Before

After

BR-1901
标准移动式
Standard Movable

The latest LED technology with tooth whitening accelerator. Combined with infra red light emission, wider spectrum of curing efficiency can be offered, more white, more efficient.

Professional dental bleaching unit
Ergonomic and streamlined design
Pre–programmable microprocessor

最新的美白仪LED技术，结合红外线理念给客户更多呵护，更好的效果。
*专业的牙科美白仪器
*弱管流线型设计
*可编程微处理器
*一个多功能电子显示介面可以控制和调整美白机的应用
*有三种美白模式供选择，四段功率输出和可调整设置不同的美白时间
*三种灯光资源选择：蓝光、白光和红光。

根管长度测定仪 Apex locator

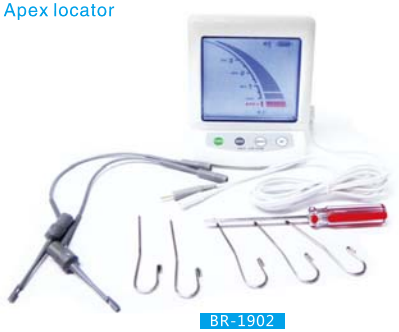

BR-1902

Feature
Measure the working length of the tooth by DC resistance,accurate esult even in dry or wet ambient.Double display.

Technical
1 .precision:0.1 mm
2.Detective precision: the tolerance of corresponding DC resistance will be no more than ± 10% when display the above value.
3.Sonar alert: when the value is≤O. 5, there will be sonar alert.
4.Powerrange: AC110V/220V ± 10%, DC8. 5–9. 2V.
5.Continuousworking time: non–stop working time will no less than 2 hours when the battery is full.
6.Theaccessories can be sterilized with high temperature, prevent the patients from cross infection.

功能特点
1.在根管内存留血、冲洗液等等情况下，也能获得精确读数。
2.双重超大液晶显示，同时显示根管锉进入根管深度以及数字显示根管锉到根尖的距离，直观清楚的传递根管长度的信息。
3.设定声控报警，时时提醒，更具人性化。
4.操作简单，使用高效、准确、方便，无X线辐射。
5.探测精度：0.1。
6.挂钩及线可高温消毒，避免交叉感染。

冷光牙齿美白仪 Professional teeth whitening

功能选择方便操作
*具音效的LED数位化指示,让医师使用时更为方便
*安静且高效率的风扇,达到最佳散热效果
*精致、轻巧的外型设计，搭配诊所空间美观大方
*全口美白时，光照低热且均匀
*波长：430-490nm

*使用电压:AC110V–240V　60Hz/50HZ

This model is for dental chair or desktop.
Ergonomic and unique optical designed of bleaching unit
Durable and flexible goose neck tube
Versatile selection for curing time presetting a Quiet and powerful fan for best radiating ,
100 to 240 Volts AC 50/60 Hz suitable for universal use
Easily clean
High uniformity of light output Perfect for tight space of a dental clinic
Wavelength: 430-490 nm
Voltage: AC110V–240V　60Hz/50HZ

BR-1903
桌上型
Desktop

BR-1904
牙椅型
For Dental Chair

17寸电脑触摸屏一体机
17" Oral endoscope (touch screen all in one)

BR-2001

触摸屏、无线鼠标、无线键盘、无线网卡
注：15寸电脑触摸屏一体机可选
15" 17" To chose

电脑触摸屏一体机

17寸触摸电脑一体机（稳定、静音、环保、节能、低碳）
电脑配置参数
CPU：Intel 1037U 1.80GHz 22nm双核处理器
主板：Intel赛扬系列主板
硬盘:固态硬盘SSD/32G或物理硬盘120G
内存：2GB/DDR3
电源:外置式创新原装电源（DC12V）
网卡:无线网卡
显示：17寸LED显示屏（1280*1024）
电脑系统：WIN7或XP 谢莫
采用台湾进口四线电阻触摸屏，透光率高；性能稳定。
全电脑只有一个按键，简单、方便、快捷！
无线鼠标、键盘、无线网卡、支架！！

screen size	17" 4:3 TFT LCD display
Resolution	1280X1024
CPUIntel 1037U 1.80GHz 22nm	dual-core processor (1.8GHz, 1MB cache)
Chipset	Intel D525 Chipset / Intel NM10 / FWH
Memory	2GB DDR3 SDRAM, up to 4GB DDR SDRAM
Integrated video card	Integrated Intel GMA 3150
Supports the expansion of VGA output	
The rear panel	
DC 12V VGA CRT RJ-45 Audio jacks 4 USB ports Serial Port (COM1)	
Power support	DC12V separate power supply
Operating Temperature	0°C~60°C (32°F~140°F)
Relative Humidity	10%~90% (non-condensing)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Color	Black

17寸多媒体U盘一体机
17" Oral endoscope
(multimedia all in one with USB disk)

BR-2002

8G U盘

口腔医患多媒体更快捷高效的医患 沟通视频资料，多达2G的医患沟通信息， 有多余6G可以使用空间，下载你喜欢的 电影、音乐。
Doctor-patient multimedia is the more convenient and effective doctor-patient communication video data. With 2G of doctor-patient communication information and 6G available space, it can download your favorite.

Features:

1. New model of 1/4 SONY CCD high resolution intra oral camera connect 17 inch LCD screen.
2.17 inch LCD can freely adjust contrast, lightness and color.
3.With high resolution, high performance and auto focus.
4.Built- in 6pcs high brightness long-lift white LED.
5.The front three control buttons: Freeze, Save, Previous imager Next, image Delete .And the reverse side control buttons: Freeze and Save.
6.Using the latest technology that can save 128 pcs images through the U-disk, the images could be permanently stored.
7.Full, quad images can compare in different angles, display the clear images.
8.Multimedia input: Video, USB, VGAand HDIMI.
9.Multimedia features make the display superior performance ,can be directly connected to the MP3,U-disk and other electronic equipment, Play movie , music and files in JPG format.
10.Support: Chinese, English, Spainish ，Deutsch, Portuguese, Arabic etc many languages.

产品特点：

1.1/4 SONY CCD高解析度口腔检测仪和17寸高清液晶显示器结合于一体的 新型机器。
2.17寸日本进口液晶显示器可以自由调节荧幕对比度、亮度和色度。
3.高解析度，高低照度，高感光度，高品质，自动对焦功能。
4.内建6颗高亮度、长寿命白光LED。
5.手柄上3个按键及背面再按键直接操控所有功能定格、储存、上一张、下一张、删除图片。
6.本机采用最新技术，可储存128张优质图片，图像永不流失，可任意删除。
7.新创1,4画面分割图像，显示清晰画面。USB输出端口可以连接电脑，配有病例管理软件。
8.支持：视频,USB, HDMI输入功能。
9.多媒体播放功能使显示器更加卓越,可直接接入MP3,U盘等电子设备、播放 电影、音乐和JPG格式图片。
10.支持：中文，英文，西班牙语，德语，葡萄牙语,阿拉伯语等多国语言。

17寸多媒体U盘显示器
17" Oral endoscope
(multimedia all in one with USB disk)

BR-2003

产品特点：
1.采用日本夏普17英寸4:3规格高清液晶屏。
2.高清液晶显示器可以自由调节荧幕对比度、亮度和色度。
3.支持：视频，AV, VGA，HDMI输入功能。
4.支持：中文，英文，西班牙语，德语，葡萄牙语,阿拉伯语等多国语言。
5.分辨率:1280x1024。
6.接收制式：PAL D/K B/G.
7.电源电压：交流 100V-220V 50/60HZ ,直流 12V4A/5A。

Features:
1.Using Japanese Sharp 17 inch, 4:3 specifications High-definition LCD screen.
2.High-definition LCD can freely adjust contrast, lightness and color.
3.Support: Video, AV, VGA, HDMI input function.
4.Support: Chinese, English, Spainish , Deutsch, Portuguese, Arabic etc many languages.
5.Resolution: 1280x1024.
6.Receiving System: PAL D/K B/G.
7.Power supply voltage: AC 100V-220V 50/60Hz, DC 12V 4A/5A.

8G U盘

多媒体播放功能使显示器更加卓越,可直接接入MP3, U盘等电子设备、播放电影、音乐和JPG格式图片。

17寸三合一显示器（VGA+TV+AV）
17" screen with VGA+TV+AV

BR-2004

产品特点：
1.采用日本夏普17英寸4:3规格高清液晶屏。
2.高清液晶显示器可以自由调节荧幕对比度、亮度和色度。
3.支持：视频,AV• VGA，HDMI输入功能。
4.支持：中文，英文，西班牙语，德语,葡萄牙语，阿拉伯语 等多国语言。
5.分辨率:1280x1024。
6.接收制式:PALD/K B/G。
7.电源电压:交流100V-220V 50/60HZ ,直流 12V4A/5A。

Features:
1.Using Japanese Sharp 17 inch, 4:3 specifications High-definition LCD screen.
2.High-definition LCD can freely adjust contrast, lightness and color.
3.Support: Video, AV, VGA, HDMI input function.
4.Support: Chinese, English, Spainish , Deutsch, Portuguese, Arabic etc many languages.
5.Resolution: 1280x1024.
6.Receiving System: PAL D/K B/G.
7.Power supply voltage: AC 100V-220V 50/60HZ, DC 12V 4A/5A.

综合型内窥镜 Endoscopy

BR-2101

产品简介

*四分一分割画面切换功能
*单画面或四画面共储存27张图
*VGA、USB信号输出功能
*200万像素

备注

显示器可以定做15寸及17寸
有黑色及白色

标准配置

*定格机:1个
*USB、VGA线各1条
*5V变压器1个
*脚踏板1个
*遥控器1个
*内窥镜手柄1个
*手柄连线1个
*驱动光盘1个
*一次性的消毒袋子100个
*挂架1个

Product Description

*A quarter of a split–screen switching
*A single screen or four images are stored in 27 pictures
*VGA. USB signal output function
*2.0 mega pixel

Standard configuration

*Fixed mesh machine 1pcs
*USB. VGA line 1pcs
*5V transformer 1pcs
*Pedal 1pcs
*Remote control 1pcs
*Endoscope handle 1pcs
*The handle cord 1pcs
*Driver CD 1pcs
*Disposable sterile bag 100pcs
*Pylon 1pcs

Monitor can customized 15-inch and 17-inch

医用口腔内窥镜的出现，使患者牙齿的病变景象清晰的展示在患者面前时，无需更多的描述或专业知识。患者也能理解治疗的迫切性。此时，医师可以在清晰直观的图像的辅助下，进一步向患者介绍可能采取的各种治疗措施，供患者根据自身各方面条件作出选择，这大大提高了患者的治疗愿望和参与程度。

现在医院和门诊对这种医用口腔电子内窥镜非常感兴趣，其中包括一些商业方面的原因。口腔内窥镜起到启发消费的作用，使患者更愿意接受治疗，从而增加诊所的效益。

口腔内窥镜支架 Endoscopy

BR-2102
塑料内窥镜支架
Endoscopy Holder(plastic)

BR-2103
金属内窥镜支架（普通型）
Endoscopy Holder(Metal)

BR-2104
金属内窥镜支架（标准型）
Endoscopy Holder(Standard)

BR-2105
西诺德金属内窥镜支架（标准型）
Sirona Endoscopy Holder(Standard)

BR-2106
豪华型内窥镜支架（Ⅰ）
Luxuary Endoscopy Holder（Ⅰ）

BR-2107
豪华型金属内窥镜支架（Ⅱ）
Luxuary Endoscopy Holder（Ⅱ）

BR-2108
金属内窥镜支架（短款）
Endoscopy holder(Short)

BR-2109
新款内窥镜支架
Endoscopy Holder

强力真空灭菌器 Steam Sterilizer



BR-2110

Product Description

Capacity:18L/23L
Sterilizing temperature:121℃，134℃
Special function:kill the AIDS(HIV),hepatitis B(HBV)mad cow virus and Bacillus
Dry procedure:vacuum drying
Display:128X64 Dots LCD,multi languages
Sterilization program:12 kinds of programs
Test program:Bowie&Dick test,Vacuum test,Helix test
Sterilizing data:print by optional external mini–printer or download by USB port
Safety features:Safe Valve;Double–control lock system and self–test alam system
Water supply system:two water tanks inside,capacity of reservoirs
(3.5L fresh water and 5L waste water)
AC power:220V/50Hz
Rated power:1600W
Instrument containers:5–layer activity pallet rack with 3 trays
Chamber size:250X355mm/250X450mm)
N.W./G.W.:45/48KG / 47/50KG
Packing size:660X550X560mm/660X550X560mm

超声波洁牙机(A型) Ultrasonic Scaler(A)

BR-2201

功能及特点

电源输入：100V–240V 50Hz/60Hz 1 2A (Max)
主机输入:30VDC 1.3A
输出的尖端振动频率:30KHz±3KHz
输出功率:3W–20W
进水压力：0. 1bar–5bar (0. 01 MPa–0. 5MPa)
重量：1.59kg

Technical spelification

Input power: 100V–240V 50Hz/60Hz 1. 2A(Max)
Host input: 30VDC 1. 3A
Tip vibration frequency out put: 30KHz ± 3KHz
Output power: 3W–20W
Water pressure： 0. 1bar–5bar (0. 01 MPa–0. 5MPa)
Weight: 1.59kg

*手柄轴芯采用钛合金制成,机械性能优异,不断头。
*手柄采用优质压电陶瓷，功率大且不衰减、效率高、产热少。
*手柄尾线采用进口材料硅胶管，柔软耐用。
*工作尖采用特殊材料精制，其末端可产生空穴效应，洁齿灭菌。
*频率自动跟踪，始终在最佳频率上，工作更稳定。
*振幅调节范围更宽。
*能快速地清除牙钻石、牙菌斑、茶牙等，不伤牙龈及釉质。
*体积小，重量轻，操作方便，外观全新设计，更美观。
*可使用EMS工作尖。

超声波洁牙机(J型) Ultrasonic Scaler(J)

连体式手柄
频率自动跟踪
工作始终保持在最佳状态
Sealed handpiece
automatic frequency tracking

BR-2202

输入电压 Power Input: 100V–240V
频 率 Frequency:30kHz±3kHz
重 量 Weight: 1.6kg
长x宽x高Dimensions: 37. 5x30. 5x11.5cm

超声波洁牙机(J2型) Ultrasonic Scaler(J2)

BR-2203

技术参数

电源输入：~220V 50HZ
进水压力：
0.1bar~5bar(0.01MPa~0.5MPa)
输入功率：38UA
主机重量：1.7kg
工作频率：28kHz±3KHz 尺寸：
137mmX95mmX213mm

Technical details:
Power input:110V~ 50Hz/60Hz
220 - 240V~ 50Hz/60Hz
Output power:3W ~ 20W
Frequency:30kHz ± 3kHz
Water pressure:0.1bar ~ 5bar(0.01MPa ~ 0.5Mpa)
Main unit weight:1.7kg
Dimensions:137mm × 95mm × 213mm

- Sealed handpiece, three colours sleeve attached.
- The handpiece sleeve can be autoclaved.
- Automatic frequency tracking.
- Automatically search the best working frequency.

超声波洁牙机(J2带LED) Ultrasonic Scaler(J2–LED)



BR-2204

技术参数

电源输入：~220V 50HZ
进水压力：
0.1bar~5bar(0.01MPa~0.5MPa)
输入功率：38UA
主机重量：1.7kg
工作频率：28kHz±3KHz
尺寸：137mmX95mmX213mm

Technical details:
Power input:110V~ 50Hz/60Hz
220 - 240V~ 50Hz/60Hz
Output power:3W ~ 20W
Frequency:30kHz ± 3kHz
Water pressure:0.1bar ~ 5bar (0.01MPa ~ 0.5MPa)
Main unit weight:1.7Kg
Dimension:137cm × 95cm × 213cm

- Sealed handpiece with light, better visibility.
- The handpiece sleeve can be autoclaved.
- Automatic frequency tracking.
- Automatically search the best working frequency.

超声波洁牙机(K型) Ultrasonic Scaler(K)

BR-2205

技术参数

电源输入：~220V 50HZ
进水压力：
0.1bar~5bar(0.01MPa~0.5MPa)
主机输入：~24V 50HZ 1.3A
主机重量：0.75kg
输入功率：38UA
电源重量：1.okg
工作频率：28kHz±3KHz
尺寸：170mmX111mmX65mm

Technical details:
Power input:110V~ 50Hz/60Hz
220 ~ 240V~ 50Hz/60Hz
Main unit input:24V~ I.3A
Output power:3W ~ 20W
Frequency:28kHz ± 3kHz
Water pressure:0.1bar ~ 5bar(0.01MPa ~ 0.5MPa)
Main unit weight:0.75kg
Adapter weight:1.2kg
Dimensions:170mm × 111mm × 65mm

1. Automatic frequency tracking ensures that the machine always works on the best frequency and performs more steadily.
2. The handpiece is detachable and can be autoclaved to the high temperature of 135° C and pressure of 0.22MPa.
3. Digitally controlled, easy operation and more efficient for scaling.

超声波洁牙机(K型带LED) Ultrasonic Scaler(K–LED)



BR-2206

技术参数

电源输入：~220V 50HZ
进水压力：
0.1bar~5bar(0.01MPa~0.5MPa)
主机输入：~24V 50HZ 1.3A
主机重量：0.75kg
输入功率：38UA
电源重量：1.okg
工作频率：28kHz±3KHz
尺寸：170mmX111mmX65mm

Technical details:
Power input:110V~ 50Hz/60Hz
220 ~ 240V~ 50Hz/60Hz
Main unit input:24V~ I.3A
Output power:3W ~ 20W
Frequency:28kHz ± 3kHz
Water pressure:0.1bar ~ 5bar(0.01MPa ~ 0.5MPa)
Main unit weight:0.75kg
Adapter weight:1.2kg
Dimensions:170mm × 111mm × 65mm

- Detachable handpiece with light, better visibility, autoclavable.
- Automatic frequency tracking.

超声波洁牙机(L型带LED)
Ultrasonic Scaler(L-LED)



技术参数
电源输入：~220V 50HZ
进水压力：
0.1bar~5bar(0.01MPa~0.5MPa)
主机输入：~24V 50HZ 1.3A
主机重量：0.73kg
输入功率：38UA
电源重量：1.0kg
工作频率：28kHz±3KHz
尺寸：190mmX125mmX60mm

Technical details:
Power input:110V~ 50Hz/60Hz
220 – 240V~ 50Hz/60Hz
Main unit input:24V~50Hz/60Hz 1.3A
5V~50Hz/60Hz 200mA(optional)
Output power:3W ~ 20W
Frequency:28kHz ± 3kHz
Water pressure:0.1bar ~ 5bar(0.01MPa ~ 0.5MPa)
Main unit weight:0.73kg
Adapter weight:1.2kg
Dimensions:190mm × 125mm × 60mm

BR-2301

BR-2302

超声波洁牙机(L型)
Ultrasonic Scaler(L)

技术参数
电源输入：~220V 50HZ
进水压力：0.1bar~5bar(0.01MPa~0.5MPa)
主机输入：~24V 50HZ 1.3A
主机重量：0.73kg
输入功率：38UA
电源重量：1.okg
工作频率：28kHz±3KHz
尺寸：190mmX125mmX60mm

Technical details:
Power input:110V~50Hz/60Hz 220 – 240V~50Hz/60Hz
Main unit input:24V~50Hz/60Hz 1.3A
5V~50Hz/60Hz 200mA(optional)
Output power:3W ~ 20W
Frequency:28kHz ± 3kHz
Water pressure:0.1bar ~ 5bar(0.01MPa ~ 0.5MPa)
Main unit weight:0.73kg
Adapter weight:1.2kg
Dimensions:190mm × 125mm × 60mm

内置式洁牙机（N2）
Built-in ultrasonic scaler(N2)

内置式洁牙机，专为牙科综合治疗台设计
Built-in scaler, special design for dental unit

BR-2303

接插式手柄，可高温高压消毒
频率自动跟踪
微电脑控制
Detachable handpiece autoclavable
automatic frequency tracking
PC control

输入电压 Power Input: 24V
频 率 Frequency:30kHz±3kHz
重 量 Weight:0.45kg
长x宽x高Dimensions:23x23x11.3cm

BR-2304
气动洁牙机(2/4孔)
Air Scaler(2/4 Hole)

BR-2305
洁牙机快换接头
Scaler Quick Coupling

BR-2306
洁牙机工作尖
Scaler Tip

喷砂枪
Air prophy

BR-2307
豪华型喷砂枪(2/4孔)
Air Prophy(2/4 hole)

BR-2308
2孔喷砂枪
Air Prophy(2 Hole)

BR-2309
豪华型喷砂枪(2/4孔)(套装)
Air Prophy(2/4 hole)(Suit)

BR-2310
4孔喷砂枪
Air Prophy(4 Hole)

BR-2311
喷砂枪嘴
Nozzle

BR-2312
草莓味喷砂粉(130g)
Strawberry Prophy Powder(130g)

BR-2313
柠檬味喷砂粉(130g)
Lemon Prophy Powder(130g)

BR-2314
薄荷味喷砂粉(130g)
Mint Prophy Powder(130g)

功能特点

1.时尚的风格，特别的外形设计，操作简单
2. 喷砂均匀，没有色斑，特定的防回吸装置，不易堵塞
3. 容易取砂，更易消毒和清洁
4. 可用360度旋转碰头，清洁更彻底
5. 外包装规格 28*19*7cm
6 重量 0.5KG/台
7 包装 纸盒

Feature

1. Attractive design allows for dexterous handling & manipulation

2. Specially designed to prevent backflow and blockage
3 Easy to clean and simple to maintain
6Easy to replace of working heads or spray nozzles
4. 360 o rotations assure effective hidden tartar removal
5 Pack size :28*19*7cm
6 Weight 0.5KG/Piece
7 pack way carton

牙椅皮垫颜色 可选
Color to chose



BR-2401
豪华型联体式牙科综合治疗台
Luxury dental unit

STANDARD CONFIGRATION:

High-speed handpiece tubing with connector 2 set
Low-speed handpiece tubing with connector 1 set
3-way syringe 2 piece
tissue box
LED dental lamp
rotating arm
balance arm
under-mounted tool tray
control box assistant
ceramic spittoon
pillow support 1 set
backrest 1 set
PU cushion 1 set
mutil function foot pedal
front cover
bottom cover
24V DC Quiet motor 1 set
down-mounted instrument tray 1 set
Water suction and saliva ejector 1 set each
Led sensor lamp 1 set
X-film vewer（24V） 1 set
Asistant control sytem 1 set
Water purified system 1 set
Water heating system 1 set
Auto water supply and flush cuspidor system 1 set each
Turnable ceramic cuspidor 1 set
Multi-function foot pedal 1 set
Dentist stool 1 piece
Key-touch system 1 set

牙椅皮垫颜色 可选
Color to chose



BR-2402
折叠联体式牙科综合治疗台
Folding type dental unit

STANDARD EQUIPMENT:

Motor dental chair control system with three memory and inter-lock	1 set
Foldaway patient chair synchronized movement of seat and backrest	1set
Luxurious operating light	1set
Auto spitton flush and cup filter sensor control system	1set
Foot controlled switch	1set
Saliva ejector with high and low suction	1set
3-way syringe(Cold/hot water)	1set
V-B operating stool	1set

SPECIFICATIONS
Power voltage 220v-50hz
Motor Voltage 24v
Air pressure 0.6Mpa-0.8Mpa
Water pressure 0.2Mpa-0.4Mpa
Weight: 330kg
Measure:1.3*1.07*1.2m

牙椅皮垫颜色 可选
Color to chose

浅灰褐 Light brown | 象牙黄 Ivory | 橙色 Orange | 粉红色 Pink | 黄色 Yellow | 苹果绿 Apple Green | 浅绿 Light Green

深绿 Dark Green | 深蓝 Dark Blue | 浅蓝 Light Blue | 天蓝 Sky Blue

BR-2501

时尚型牙科综合治疗台
New fashion dental unit

STANDARD CONFIGRATION:

High speed H.P.tie-in	2 sets
Low speed H.P.tie-in	1 set
Three-way H.P.tie-in	2sets
All directional head rest	1set each
Rotary assistant position	1set each
Film checking lamp	1 set
Cold light oral cavity lamp	1 set
2sets of saliva ejectors	1 set each
Water heating system	1 set each
Outlay pure water bottle	1 set
Whole ceramic spittoon	1 set
Completely electric muted generator	1 set each
Sanitary seamtess cushion and backrest	1 set each
Dentist seat 1 piec	

Specification

Power cupply AC220V 10%50Hz
Air supply 500-800Kpa
Water supply 200-400Kpa
Power 800Wmax

牙椅皮垫颜色 可选
Color to chose

浅灰褐 Light brown | 象牙黄 Ivory | 橙色 Orange | 粉红色 Pink | 黄色 Yellow | 苹果绿 Apple Green | 浅绿 Light Green

深绿 Dark Green | 深蓝 Dark Blue | 浅蓝 Light Blue | 天蓝 Sky Blue

BR-2502

经济型牙科综合治疗台
Economic dental unit

STANDARD EQUIPMENT:

Luxurious rotatable tempered glass spitton	1set
24V nosieless DC motor chair	1set
Motor dental chair control system with three memory and inter-lock	1set
Extendable cushion DC motor chair	1set
High grade articulated headrest	1set
Operating light	1set
Saliva ejector with high and low suction	1set
Instrument tray with air brake	1set
3 Way syringe(Cold/hot water)	each 1set
Full-functional foot controller	1set
Water Tank(air pressurized)(built out)	1set
V-B operating stool	1set

SPECIFICATIONS

Power voltage 220v-50hz
Motor Voltage 24v
Air pressure 0.6Mpa-0.8Mpa
Water pressure 0.2Mpa-0.4Mpa
Weight:280kg
Measurement:1.47*1.07*1.17m

牙椅皮垫颜色 可选
Color to chose

浅灰褐 Light brown | 象牙黄 Ivory | 橙色 Orange | 粉红色 Pink | 黄色 Yellow | 苹果绿 Apple Green | 浅绿 Light Green

深绿 Dark Green | 深蓝 Dark Blue | 浅蓝 Light Blue | 天蓝 Sky Blue

BR-2601

经济型牙科综合治疗台
Economic dental unit

STANDARD CONFIGRATION:

4-hole (2-Hole) High-speed handpiece tubing with connection 2 set
4-hole (2-hole) Low-speed handpiece tubing with connection 1 set
3-way syringe 2 piece
dental stool 1 piece
glass spitton (moveable)
down-mounted instrument tray 1 set
plastic box
pillow support 1 set
Lower chair frame
front cover
Square foot pedal 1 set
Strong and weak suction 1 set each
Assistant system without control 1 set
24V DC Quiet motor 1 set
single (double) armrest 1set
backrest 1 set
PU cushion 1 set
water heater 1 set
Water suction and saliva ejector 1 set each

牙椅皮垫颜色 可选
Color to chose

浅灰褐 Light brown | 象牙黄 Ivory | 橙色 Orange | 粉红色 Pink | 黄色 Yellow | 苹果绿 Apple Green | 浅绿 Light Green

深绿 Dark Green | 深蓝 Dark Blue | 浅蓝 Light Blue | 天蓝 Sky Blue

BR-2602

经济型牙科综合治疗台
Economic dental unit

STANDARD CONFIGRATION:

4-hole (2-hole)High-speed handpiece tubing with connection 2 set
4-hole (2-hole)Low-speed handpiece tubing with connection 1 set
3-way syringe 2 piece
down-mounted instrument tray 1 set
plastic box
Water suction and saliva ejector 1 set each
24V DC Quiet motor 1 set
ceraminc spitton (non-moveable)
Square operation lamp cx-072 1 set
single (double)armrest 1set
X-film vewer (24V) 1 set
Asistant control sytem 1 set
Water purified system 1 set
Water heating system 1 set
Auto water supply and flush cuspidor system 1 set each
Fixed ceramic cuspidor 1 set
Lower chair frame
Square foot pedal 1 set
Dentist stool 1 piece

NEW

BR-2701

新款无油静音空压机
带自动排水功能
New Oil-fee silent air compressor
with Automatic drainage function

BR-2702

新款无油静音空压机
New Oil-fee silent air compressor

1EW-32（一拖一）

技术参数

额定电压：220V AC 50Hz
电流：2.4A
功率：545W
容积流量：70L/min
启动压力：0.5MPa
额定排气压气：0.8MPa
储气罐容积：32L
噪音：65~75dB
重量：28kg(32升)
包装尺寸：42X42X65cm(32升)纸箱包装

SPECIFICATIONS

Supply voltage:220V AC 50Hz
Electric corrent:2.4A
Frequency:545W
Power:70L/min
Start-up pressure:0.5MPa
Discharge pressure:0.8MPa
Air tank:32L
Noise:65~75dB
Weight:28kg(32L)
Package size: 42X42X65cm(32L)

备注：此机可做蓝、白两色
Marking:
Two colors for your order,white and blue.

质保1年
Guarantee
1year

BR-2703

一拖一无油静音空压机
One For One Oil-free Silent Air Compressor

1EW-32（一拖一）

技术参数

额定电压：220V AC 50Hz
电流：2.4A
功率：545W
容积流量：70L/min
启动压力：0.5MPa
额定排气压气：0.8MPa
储气罐容积：32L
噪音：65~75dB
重量：28kg(32升)
包装尺寸：42X42X65cm(32升)纸箱包装

SPECIFICATIONS

Supply voltage:220V AC 50Hz
Electric corrent:2.4A
Frequency:545W
Power:70L/min
Start-up pressure:0.5MPa
Discharge pressure:0.8MPa
Air tank:32L
Noise:65~75dB
Weight:28kg(32L)
Package size: 42X42X65cm(32L)

备注：此机可做蓝、白两色
Marking:
Two colors for your order,white and blue.

质保1年
Guarantee
1year

BR-2801

一拖二无油静音空压机
One For Two Oil-free Silent Air Compressor

2EW-32（一拖二）

技术参数

额定电压：220V AC 50Hz
电流：3.7A
功率：845W
容积流量：100L/min
启动压力：0.5MPa
额定排气压气：0.8MPa
储气罐容积：32L
噪音：65~75dB
重量：28kg(32升)
包装尺寸：43X43X68cm(32升)纸箱包装

SPECIFICATIONS

Supply voltage:220V AC 50Hz
Electric corrent:3.7A
Frequency:845W
Power:100L/min
Start-up pressure:0.5MPa
Discharge pressure:0.8MPa
Air tank:32L
Noise:65~75dB
Weight:28kg(32L)
Package size: 43X43X68cm(32L)

备注：此机可做蓝、白两色
Marking:
Two colors for your order,white and blue.

质保1年
Guarantee
1year

BR-2802

一拖三无油静音空压机
One For Three Oil-free Silent Air Compressor

3EW-60（一拖三）

技术参数

额定电压：220V AC 50Hz
电流：4.8A
功率：1100W
容积流量：140L/min
启动压力：0.5MPa
额定排气压气：0.8MPa
储气罐容积：60L
噪音：65~65dB
重量：70kg
包装尺寸：85X45X60cm木箱

SPECIFICATIONS

Supply voltage:220V AC 50Hz
Electric corrent:4.8A
Frequency:1100W
Power:140L/min
Start-up pressure:0.5MPa
Discharge pressure:0.8MPa
Air tank:60L
Noise:65~65dB
Weight:70kg
Package size: 85X45X60cm

BR-2803

一拖四无油静音空压机
One For Four Oil-free Silent Air Compressor
1690W 60L 200L/min

BR-2804

一拖五无油静音空压机
One For Five Oil-free Silent Air Compressor
1635W 118L 210L/min

BR-2805

一拖六无油静音空压机
One For Six Oil-free Silent Air Compressor
2535W 118L 300L/min

BR-2901
可旋转医生座椅
(塑料五爪盘)
塑料转盘
体积：53x26x54cm
重量:9. 6kg
Rotating Doctor Chair
(Plastic Base)
Volume： 53x26x54cm
Weight： 9. 6kg

BR-2902
可旋转医生座椅
(金属五爪盘)
金属铁转盘
体积：53x26x54cm
重量:9. 6kg
Rotating Doctor Chair
(Metal Base)
Volume： 53x26x54cm
Weight： 9. 6kg

BR-2903
宽靠背医生座椅
(金属五爪盘)
体积：53x26x54cm
重量:10kg
Wide Back Doctor Chair
Volume： 53x26x54cm
Weight： 10kg

BR-2904
金属五爪盘
Pedestal With Wheels(metal)

BR-2905
塑料五爪盘
Pedestal With Wheels(plastic)

BR-2906
吧圈
Circle

BR-2907
铁转盘
Turntable(Metal)

BR-3001
金属气动弹簧(140行程)
Metal Steel Gas
Spring(140stroke)

BR-3002
不锈钢气动弹簧(140行程)
Stainless Gas Spring
(140stroke)

BR-3003
脚轮
Foot Wheel

BR-3004
静音脚轮
Foot Wheel(pu)

BR-3005
靠背
Arm

BR-3006
升降扳手
Chair Spanner

BR-3007
小圆盘
Small Disk

BR-3008
大圆盘
Big Disk

BR-3009
座垫
Cushion

BR-3010
Led 导光棒（Φ8）
Light Guide（Φ8）

BR-3011
Led 导光棒（Φ10）
Light Guide（Φ10）

BR-3012
Led 导光棒（Φ10）
Light Guide（Φ10）

BR-3013
Led 导光棒（Φ10）
Light Guide（Φ10）

BR-3014
Led 导光棒（Φ13.8）
Light Guide（Φ13.8）

BR-3015
Led 导光棒（Φ12）
Light Guide（Φ12）

BR-3016
遮光片（圆）
Anti-dazzling Screen

BR-3017
遮光片（椭圆）
Anti-dazzling Screen

BR-3018
光固化电池
Curing Battery

BR-3019
光固化灯泡
Bulb Of Curing Machine

BR-3020
不锈钢车针消毒盒
Stainless Steel Needle
Sterilization Box

BR-3101
无碳刷打磨机G3000
Brushless grinding machine(G3000)

BR-3102
无碳刷打磨机G6000
Brushless grinding machine(G6000)

BR-3103
有碳刷打磨机 V500
Brush grinding machine(V500)

BR-3104
有碳刷打磨机V800
Brush grinding machine(V800)

BR-3105
南韩打磨机（204门诊、技工）
Mirco Motor(made In Korea 204+102l)

BR-3106
南韩打磨机（90门诊、技工）
Mirco Motor(made In Korea 90+102l)

8x14x4

6x12x4

4x9x4

3x8x4mm

BR-3107
打磨机轴承
Micro Motor Bearing

BR-3108
门诊手柄
Mirco Motor Shaft(dental)

BR-3109
技工手柄
Mirco Motor Shaft(technican)

BR-3110
线路板
Circuit Board

BR-3111
三瓣簧
Triple Spring

BR-3112
顶轮
Top Roller

BR-3113
调速管
Speed Tube

BR-3114
调速旋扭
Speed Governor

BR-3115
碳刷
Carbon Brushes

BR-3116
转子
Rotor

BR-3117
打磨机脚踏
Pedal

BR-3118
电源线
Power Cord

BR-3119
变压器
Transformer

BR-3120
一拖一机头(545w)
Compressor Head One
For One(545w)

BR-3121
一拖二机头(845w)
Compressor Head One
For Two(845w)

BR-3122
一拖一连杆
Connecting Rod
(545w)

BR-3123
一拖二连杆
Connecting Rod
(845w)

BR-3124
拖一缸套
Steel Bushing
(For 545w)

BR-3201
拖二缸套
Steel Bushing(For 845w)

BR-3202
大轴承（空压机）
Big Bearing
(Comperessor Motor)

BR-3203
小轴承（空压机）
Small Bearing
(Comperessor Motor)



BR-3204
方型缸盖密封圈
Cyinder

BR-3205
阀板密封圈
Valve
Plateseal Ring

BR-3206
泵头外壳
MOTOR COVER

BR-3207
带出线口泵头外壳
MOTOR COVER

BR-3208
缸盖
CYLINDER COVER

BR-3209
偏心轮（拖一）
WHeel

BR-3210
偏心轮（拖二）
WHeel

BR-3211
拖一皮碗
Cup Leather(For 545w)

BR-3212
拖二皮碗
Cup Leather(For 845w)

BR-3213
压力控制器
Pressure Controller

BR-3214
消音器
Silencer

BR-3215
220v/24v 电磁阀
220v/24v Magnetic Valve

BR-3216
安全阀
Safe Valve

BR-3217
球阀
Ball Valve

BR-3218
进气弯头
Intake Elbow

BR-3219
接头
Connector

BR-3220
电容
Capacitor

BR-3221
缸盖连接管
PIPLE FOR CYLINDER

BR-3222
过滤器
Strainer

BR-3223
机脚
Rubber Foot

BR-3224
防振垫
Crash Roll



BR-3225
压力表
Round Pressure Meter

BR-3226
空阀机压板
Metal Plate

BR-3227
气门阀片
Air lock

台湾轴承
Taiwan Handpiece Bearing

台湾进口，寿命长，力量大，声音小，售后问题不用愁。

NEW

BR-3301
台湾轴承(陶瓷)
Taiwan Bearing
(ceramic)

BR-3302
台湾轴承(钢珠)
Handpiece
Bearing(steel)

BR-3303
陶瓷轴承
Bearing(ceramic)

BR-3304
钢珠轴承
Bearing(steel)

BR-3305
迷你轴承(陶瓷)
Mini Bearing(ceramic)

BR-3306
博士轴承
Boss Bearing

BR-3307
直机轴承
Sraight Handpiece
Bearing

BR-3308
弯机轴承
Contra Angle
Bearing

BR-3309
弯机筒夹(铜)
Contra Angle
Cartridge(Copper)

BR-3310
弯机筒夹(不锈钢)
Contra Angle
Cartridge(Steel)

BR-3401
筒夹
Cartrige

BR-3402
迷尔三半簧
Mini Triple Spring

BR-3403
标准三半簧
Standard Triple Spring

BR-3404
大头三半簧
Torque Triple Spring

BR-3405
按压轴
Push Drive Link

BR-3406
弯机头(不含筒夹)
Head Of Contra Angle
(without Axis Of Roation)

BR-3407
弯机传动轴
Axis Of Rotation

BR-3408
多功能手机维修工具
Handpiece Multifunctional
Maintenance Tools

BR-3409
手机维修工具
Handpiece
Maintenance Tools

BR-3410
多功能手机维修工具
Handpiece
Maintenance Tools

BR-3411
多功能手机维修工具
Handpiece
Maintenance Tools

BR-3412
4孔快接头（通用）
4 Hole Coupling
(for Nsk)

BR-3413
4孔快接头(西北)
4 Hole Coupling
(for Sinol)

BR-3414
2孔快接头（通用）
2 Hole Coupling
(for Nsk)

BR-3415
2孔快接头(西北)
2 Hole Coupling
(for Sinol)

BR-3416
2孔螺旋带接头
2 Hole Coupling

BR-3417
4孔螺旋带接头
4 Hole Coupling

BR-3418
2/4孔螺旋
2/4 Hole Screw

BR-3419
2孔接头
2 Hole Socket

BR-3420
4孔接头
4 Hole Socket

BR-3421
手机尾端压力表
Handpiece Pressure
Meter

BR-3422
NSK按压后盖
NSK push button
back cover

BR-3423
标准后盖
Standard Back Cover

BR-3424
2孔胶垫
2 Hole Socket Seal

BR-3425
4孔胶垫
4 Hole Socket Seal

BR-3426
塑料扳手
Plastic Spanner

BR-3427
大头扳手
Torque Spanner

BR-3428
铁扳手
Metal Spanner

BR-3429
取针器A
Handpiece Key A

BR-3430
取针器B
Handpiece Key B

BR-3501
LED口腔灯
LED Lamp

技术参数
输入电压：12VAC±20
频　　率：50/60Hz
功　　率：8VA
额定电流：800mA
照　　度：8000－30000LUX
色　　温：6000° K
光斑尺寸：70×140MM(距离700MM)
控制方法：感应式开关,感应六级亮度调整

BR-3502
LED口腔灯
LED Lamp

技术参数
输入电压：12VAC±20
频　　率：50/60Hz
功　　率：8VA
额定电流：800mA
照　　度：8000－30000LUX
色　　温：6000° K
光斑尺寸：70×140MM(距离700MM)
控制方法：感应式开关,感应六级亮度调整

BR-3503
12V带感应光灯
Sensor Oral Light 12V

BR-3504
12V光灯
Oral Light 12V

BR-3505
12V方形小光灯
Ellipse Small Light 12V

BR-3506
12V圆形小光灯
Round Small Light 12V

BR-3507
圆形反光镜片
Round Reflector



BR-3508
方形反光镜片
Ellipse Reflector

BR-3509
口腔灯拉手
LIGHT HANDLE

BR-3510
12V 50W口腔灯泡
12v 50w Mouth
Lamp Bulb

BR-3511
12V 50W带线口腔灯泡
12v 50w Mouth
Lamp Bulb

BR-3512
口腔灯座
Lamp Holder

BR-3513
方形灯罩
SQUARE LENS

BR-3514
圆形灯罩
ROUND LENS

BR-3601
24V低压观片灯
24V Film Viewer

BR-3602
220V高压观片灯
220V Film Viewer

BR-3603
220V全景观片灯
220V Panorama
Film Viewer

BR-3604
上电机
Lower Electric Motor

BR-3605
下电机
Down Electric Motor

BR-3606
牙椅气弹簧
Dental Chair Spring

BR-3607
光纤电源盒
Optical Fiber
Power Box

BR-3608
光纤电源盒
Optical Fiber
Power Box

BR-3609
200W变压器
220W Transformer

BR-3610
75W变压器
75W Transformer

BR-3611
治疗板
Circuit Board

BR-3612
程控器
Program Controller

BR-3613
热水器
Heater

BR-3614
漱口管
Rinse Pipe

BR-3615
冲盂管
Ceramic Pipe

BR-3616
六角膜片
Crossing Patch

BR-3617
三联膜片
Triple Patch

BR-3618
A4膜片
A4 Patch

BR-3619
灯臂
Lamp Arm

BR-3620
中柱
Column

BR-3621
脚垫
Dental Bibs

BR-3622
布套
Dental Chair Cloth Sets

BR-3623
方形压力表
Square Pressure Meter

BR-3624
涡轮机减压阀
Air Reducing Valve
For Turbine

BR-3625
治疗台空气减压阀
Air Reducing Valve
For Chair

BR-3626
多功能脚踏
Multifunction Foot
Control

BR-3627
2孔抛光脚踏
Round Foot Pedal
(buffing)

BR-3628
4孔抛光脚踏
Round Foot Pedal
(buffing)

BR-3629
脚踏开关
Foot Pedal

BR-3630
脚踏开关（塑料）
Foot Pedal
(plastic)

BR-3701
三用枪
3 Way Syringe

BR-3702
直三用枪
Straight 3 Way Syringe

BR-3703
三用枪嘴
Nozzle

BR-3704
5x8接头（直通）
5x8 Adaptor(One way)

BR-3705
5x8带开关接头（直通）
5x8 Adaptor With Switch(One way)

BR-3706
5x8接头（三通）
5x8 Adaptor (Three way)

BR-3707
5x8接头（四通）
5x8 Adaptor (Four way)

BR-3708
2-4接头
2-4 Adaptor

BR-3709
4-2接头
4-2 Adaptor

BR-3710
双联压水阀
2 In 1 Air Switch

BR-3711
调水阀（3m）并排嘴
Water Regulation Valve Abreast (3m)

BR-3712
调气阀（5m）
Air Regulation Valve (5m)

BR-3713
调水阀（3m）
Water Regulation Valve (3m)

BR-3714
弱吸头(铝)
Aluminum Weak Suction

BR-3715
强吸头(铝)
Aluminum Strong Suction

BR-3716
脚踏阀（3m）
Foot Valve (by Water)3m

BR-3717
脚踏阀（5m）
Foot Valve (by Air)5m

BR-3718
弱吸形成器
Weak Sucking Shaping Machine

BR-3719
强吸形成器
Strong Sucking Shaping Machine

BR-3720
简易减压阀
Simple Pressure Reducer

BR-3721
四联膜片阀
4 In 1 Valve

BR-3722
四联膜片阀(上海)
4 In 1 Valve

BR-3723
三联膜片阀
3 In 1 Valve

BR-3724
三联膜片阀（上海）
3 In 1 Valve(shanghai)

BR-3725
箱体集成阀
Integration Valve

BR-3726
水源转换开关（拔动）
Water Exchange Valve(turn)

BR-3727
水源转换开关（推拉）
Water Exchange Valve(push)

BR-3728
六角压水阀
Water Pressing Valve(six-angle)

BR-3729
方形压水阀
Square Water Pressing Valve

BR-3730
方形压水阀
Square Water Pressing Valve

BR-3801
换向阀
Direction Exchange Valve

BR-3802
常闭挂架阀
Normal Close Hanging Valve

BR-3803
常开挂架阀
Normal Open Hanging Valve

BR-3804
常闭挂架阀
Normal Close Hanging Valve

BR-3805
常开挂架阀
Normal Open Hanging Valve

BR-3806
铜三通
T-joint

BR-3807
上挂常开挂架阀
Normal Open Up Hanging Valve

BR-3808
上挂常闭挂架阀
Normal Close Up Hanging Valve

BR-3809
4孔脚踏开关阀
4 Hole Foot Pedal Valve

BR-3810
2孔脚踏阀芯
2 Hole Pedal Switch Core

BR-3811
单向阀
One Way Valve

BR-3812
气刹开关
Spirit Valve

BR-3813
气锁开关
Air Switch

BR-3814
冷光灯开关
Switch Of Lamp

BR-3815
西诺德挂架阀5mm
Hanging Valve(for Sirona)

BR-3816
西诺德挂架阀3mm
Hanging Valve (for Sirona)

BR-3817
方形五通
Square 5-way Adaptor

BR-3818
方形六通
Square 6-way Adaptor

BR-3819
金属铜多通
Copper Adaptor

BR-3820
脚踏壮态阀
Pedal Switch State Vale

BR-3821
脚踏吹屑阀
Debris Sucking Valve

BR-3822
流量调节器
Flow Regulation

BR-3823
气电开关
Air Electrical Valve

BR-3824
单向阀
One Way Valve

BR-3825
放水阀
Purge Valve

BR-3826
总气开关
Main Air Switch

BR-3827
直通（3mm）
ADAPTOR

BR-3828
副控挂架阀
Hanging Valve

BR-3829
洁牙机快接头（防回吸）
Scaler coupling

BR-3830
洁牙机快接头
Scaler coupling

BR-3901
牙科附加台（椭圆）
Rotatable Plate(ellipse)

BR-3902
牙科附加台（圆形）
Rotatable Plate(round)

BR-3903
多功能纸巾盒
Multifunction Tissue Box

BR-3904
水杯架
Water Cup Frame

BR-3905
豪华水杯架
Glass Frame(luxuary)

BR-3906
纸杯筒
Paper Cup

BR-3907
储水瓶(1000ml)
Water Bottle
1000ml

BR-3908
储水瓶
Water Bottle With Cover
600ml (transparent)

BR-3909
储水瓶带盖
Water Bottle
600ml(white)

BR-3910
白色储水瓶
Water Bottle
600ml(white)

BR-3911
色储水瓶盖
Cover Of Water Bottle

BR-3912
冲供水组合
KIT FOR FLUSHING
AND WATER SUPPLY

BR-3913
冲供水组合座子
Water pipe

BR-3914
大挂架
Big Holder

BR-3915
白色单孔挂架
Holder(white)

BR-3916
五联挂架
5–set Holder

BR-3917
副控盒Ⅰ
Assistant Control Box

BR-3918
副控盒Ⅱ
Assistant Control Box

BR-3919
冲孟管
Ceramic Pipe

BR-3920
强吸头
Strong Sucking Pipe

BR-3921
弱吸头
Weak Suction Pipe

BR-3922
弱吸头（新款）
Weak Suction Pip(new)

BR-3923
强吸头（新款）
Strong Suction Pip(new)

BR-3924
塑料直通
Big–big Adaptor/
Small–small Adaptor

BR-3925
塑料三通
Big–big–big Adaptor

BR-3926
塑料四通
4–way Adaptor

BR-4001
塑料六通
6–way Adaptor

BR-4002
下水道多通
Multi–purpose Sewer
Adaptor

BR-4003
转换接头
Transformer
Adaptor

BR-4004
脚踏板
Foot Board

BR-4005
脚控阀
Foot Control Valve

BR-4006
纸巾盒
Tissue Box

BR-4007
防护眼镜
Protect Glass

BR-4008
石膏碗
Plaster Bowl

BR-4009
管座
Holder

BR-4010
弱吸过滤杯(大)
Strong Weak
Suction Filter

BR-4011
端盖
Lid

BR-4012
强吸过滤杯(大)
Small Strong Weak
Suction Filert

BR-4013
棉花杯
Cotton Cup

BR-4014
管扎
Cable Ties

BR-4015
集污杯
Dirt Collector

BR-4016
不锈钢托槽
Bracket Metal

BR-4017
陶瓷托槽
Bracket Ceramic

BR-4018
漏斗（短）
Funnel(short)

BR-4019
漏斗（长）
Funnel(long)

BR-4020
圆气瓶
Round Air Bottle

BR-4021
透明水过滤器(铜)
Water Filter(Excluding Joint)

BR-4022
水过滤器（塑料）
Main Air Switch

BR-4023
头枕支架
Headrest holder

BR-4024
头枕支架
Headrest holder

BR-4025
牙椅扶手
Armrest

BR-4101
4孔高密度进口手机管(带接头)
4 Hole Imported Handpiece Tube(Silica Gel)(With Socket)

BR-4102
6孔高密度进口光纤手机管
Imported Opctical Fiber Handpiece Tube(Silica Gel)

BR-4103
2孔高密度进口手机管(带接头)
2 Hole Imported Handpiece Tube(Silica Gel)(With Socket)

宝来医疗器械有限公司推出的高密度进口手机管，是一种高密度的手机软管，管子采用高分子材料高温高压挤兑成型，产品厚度均匀，伸缩力强，具有耐油，耐高温，耐高压，不变形，不变硬，不怕寒等特点，可用于低温-30℃到高温130℃之间。

- 连接头采用高硬度的优质铜，耐磨损，用多久都亮丽如新！
- 产品整体带精美的独立包装，高档大方，提升档次！
- 可广泛用于各类诊所、医院的设备上，美观耐用，保用三年！

BORA Medical Imported handpiece tube is a kind of high density handpiece tube, this tube is made of polymer materials,run of high temperature and high pressure forming.the product thickness, strong expansion force, oil resistance, resistance to high temperature, and high pressure,no deformation, no hard,resistance of cold, etc.can be used for between temperature low – 30 ℃ and high 130 ℃.

- Connection adaptor is high hardness grinding the copper,not wear out, not scratched, with long beautiful like new!
- With elegant independent packaging, high-grade generous, improve the grade!
- Can be widely used in all kinds of clinic, hospital, beautiful and durable, three years warranty!

BR-4104
4孔高密度进口手机管
4 Hole Imported Handpiece Tube(Silica Gel)

BR-4105
4孔复合管（带接头）蓝
4 Hole Tubing With Socket(Blue)

可选颜色
Color to choose

透明 Transparent　蓝色 Blue



BR-4201
进水进气管（4x2.5）
Inner Tube Pu :4 × 2.5



BR-4202
进水进气管（4x6）
Inner Tube Pu :4x6



BR-4203
进水进气管（3x2）
Inner Tube Pu :3x2



BR-4204
进水进气管（5x8）
Inner Tube Pu :5x8

BR-4205
4孔手机管带接头（硅胶）
4 Hole Handpiece Tube(silica Gel)(With Socket)

BR-4206
2孔手机管带接头（硅胶）
2 Hole Handpiece Tube(silica Gel)(With Socket)

BR-4207
弱吸管（硅胶）
Weak Suction Tube (silica Gel)

BR-4208
2/4孔手机管不带接头（硅胶）
2/4 Hole handpiece tube(silica Gel)

BR-4209
2孔脚踏开关管
2 Hole Foot Pedal Tube

BR-4210
4孔脚踏开关管
4 Hole Foot Pedal Tube

BR-4211
4孔手机复合管
4 Hole Tubing

BR-4212
三用枪直管
3 Way Syringe Straight Tube

BR-4213
手机外管
Handpiece Outer Tube

BR-4214
脚踏外管
Foot Control Outer Tube

BR-4215
三用枪螺旋管
Coile Of Triple Syringe

BR-4216
2孔手机螺旋管(带接头)
2 Hole Handpiece Tube With Socket

三孔喷水 Three–hole spray

创新的多孔喷水系统
产生大量的水喷雾并且提升30%的冷却效果。
Porous sprinkler system–Enhance 30% cooling effect



照明度 Illumination

自助发电LED光源，无须任何补助电源和副件，光照度温和，同时避免口腔内部的无光死角，保证了工作效率。
Automatic generation of LED light source, without any auxiliary power supply and accessories, moderate illumination while avoiding the dead space of inside the mouth of the light, to ensure work efficiency.)

按压式按钮换车针
Push–button to transfer needle

具备强大夹持力的快速夹持系统（35N）。
换取车针更轻松。
More easily with strong clamping force clamping system (35N) in exchange for needle.

机芯结构
Movement of the structure

精确的操作不仅要求操作稳固，还要求涡轮手机在任何转速下都无振动。
Accurate operation requires not only solid, also requires the turbine have no vibration at any speed

泵头结构图 Pump Structure Diagram:

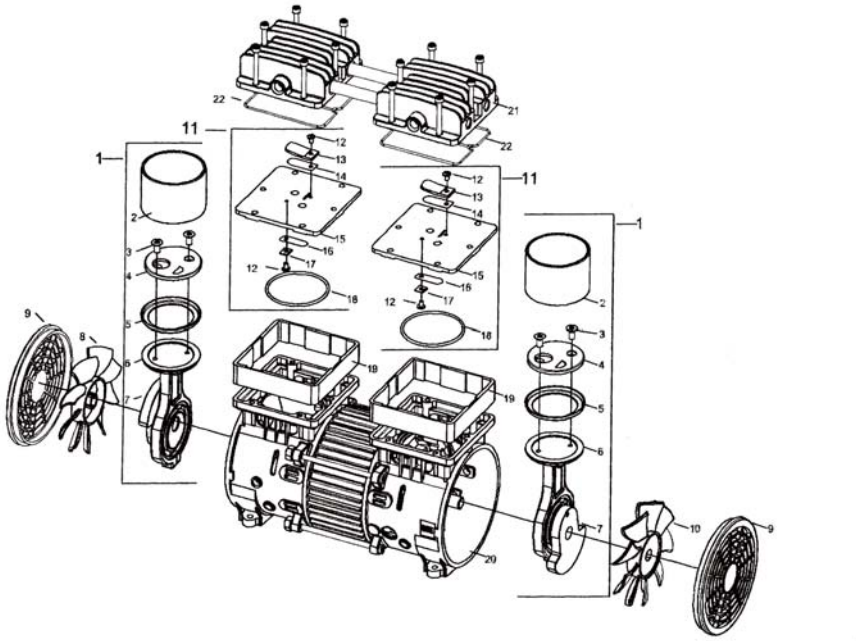

序号	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22
名称	连杆组件	缸套	压板螺钉	压板	皮碗	连杆	偏芯轮	左风扇	风罩	右风扇	阀板组件	阀板螺钉	阀片固定板	排气阀片	阀板	进气阀片	阀片垫片	O型密封圈	隔套	机壳	缸盖	缸盖密封圈
用量	2	2	4	2	2	2	2	1	2	1	2	4	2	2	2	2	2	2	2	2	1	2

泵头技术参数表 Technic specificaton:

项目	Item	标准
额定电压 V	Supply voltage V	220VAC 50Hz
输入功率 W	Frequency W	≤ 840W (545W)
额定容积流量 m^3/h	Volume Power m3/h	$6M^3/h$ ($4M^3/h$) @700KPa
额定工作压力 KPa	Working power: Kpa	800KPa
最大瞬间压力 KPa	Max instant power: Kpa	≥ 900KPa
额定转速 RPM	Speed RPM	≥ 1390RPM
噪音 dB (A)	Noise	≤ 50 ~ 60dB (A)
使用环境 温暖℃	Environment&temperature	0-40℃
绝缘等级	Insulation class	B
冷态绝缘电阻（常态）MΩ	The Cold Insulation resistance (normal)	≥ 500MΩ
耐电压强度	Dielectric strength	1500V/50Hz 无击穿
热保护器	Heat protector	自动复位 145±5℃
工作制	Work system	连续
配置 电容 μF	Configuration capacitor uF	30μF±5%
引出导线	Pigtail wire	AWG18 125℃ 长度 540mm
净重 kg	N.W.: kgs	11.5 (9.5) kg
外型尺寸 mm	Shape size mm	264.5x138x214.5mm
安装尺寸 mm	Assemble size	223.3x88.9mm （地脚螺纹 M6）
重新启动压力 KPa	Restart pressure	0KPa
进排气孔 的螺纹规格	Into the vent thread specifications	6-PT1/4-19

▲ 货物发运
Products delivery

▲ 生产车间
production

Customer satisfaction is a major priority of our company and we appreciate your continued patronage.



▲ 公司展会
Company exhibition